



All in one - Contact, Contactless & Swipe Card Reader

Supported Payment Schemes

- MasterCard PayPass Mag Stripe+ M/Chip
- Visa PayWave MSD + qVSDC
- American Express ExpressPay, Discover Zip
- Contact card: EMV Level 1 + Level 2 - Certified
- Contactless: EMV Level 1 + Level 2 - Certified
- Magnetic Stripe Card - ISO7811, Track 1 + Track 2
- Other cards supported: NFC, MIFARE, HID-iClass
- Support of payments applications global and local environment



Technical Information

- Interface communication - RS232 up to 115,200 kbps
- 2 X 16 Characters LCD display + 4 LEDs + Buzzer + Speaker
- Transaction cancel button
- Power Supply: 8 Volt DC - 16 Volt DC
- Security - Support of DES, 3DES, AES, RSA, SHA1 algorithms
- On-board SAM: EMV/HID support
- RF contactless Interface: Frequency - 13.56 MHz, MIFARE, NFC, HID

Standards:


- ISO 7816 Contact Smart Card, approved by EMVco
- ISO 14443 Type A and B, approved by EMVco
- ISO 15693

Nayax Ltd.
4 Hanechoshet St. Tel Aviv, 69710, Israel
Tel: +972 3 7694360 | Fax: +972 3 7694344
info@nayax.com | www.nayax.com





All in one - Contact, Contactless & Swipe Card Reader

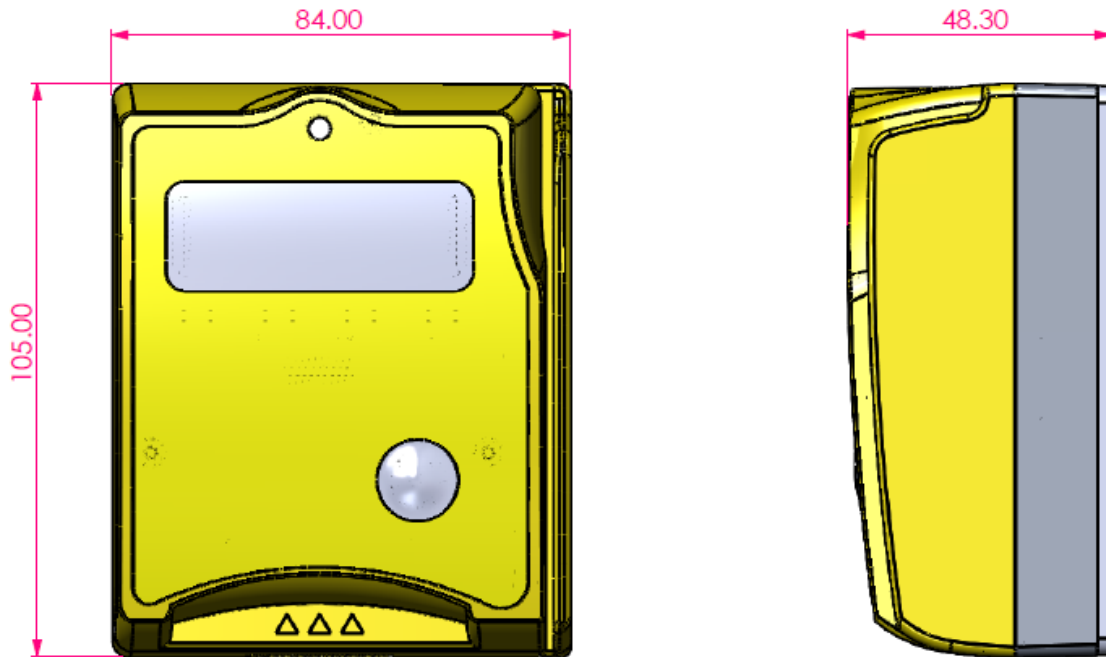

Physical Dimensions

- H - 4.13" (105mm)
- W - 3.31" (84mm)
- D - 1.9" (48.3mm)

Weight - 230 gram

Regulatory Compliance

- EMVco Level 1 + Level 2
- CE + FCC + RoHS

Operating Temperature:

-30°C ~ 50°C (-22°F - 122°F)

Humidity: 5% ~ 95% (non-Condense)

Storage Temperature:

-40°C ~ 60°C (-40°F - 140°F)

Humidity: 5% ~ 95% (non-Condense)

Nayax Ltd.

4 Hanechoshet St. Tel Aviv, 69710, Israel

Tel: +972 3 7694360 | Fax: +972 3 7694344

info@nayax.com | www.nayax.com

